Take a look at the following information featuring both new machines and models that have been recently revamped by the manufacturers. For more information on any of these products, simply fill out the reader service card included in this issue.



AGL EZ Dig Pro

The EZ Dig Pro for excavators and backhoes provides precise grade control for digging a fixed depth or a slope, without the need for a person in the excavation to check depth. Three solarpowered, magnet-mounted sensors take into account the movement and angle of the bucket, boom and dipper stick to give continuous depth control indication (transmitted via wireless RF communication) on the in-cab display. The oneperson system can be installed and calibrated by any operator in 45 minutes or less. It can also be calibrated to several machines, and retains the data as it is moved between equipment. Indicate **10** on inquiry card



Screen Machine JXT Jaw Crusher

The 98,000-lb. track-mounted JXT Jaw Crusher features a powerful Universal Engineering jaw crusher and a 40" x 13' vibratory grizzly feeder with a 14-ft.-long feed hopper opening. Hydraulic blockage clearance and remote control hydraulic adjustment facilitate maximum productivity. The tramp iron relief feature automatically senses and bypasses uncrushable materials throughout operation. Wireless remote control of movement/operation enables quick and efficient setup and operation. Power is provided by a 300-hp Caterpillar C-9 diesel engine with ACERT technology. Indicate 11 on inquiry card




K-Tec 1254 ADT Pull Scraper

The 1254 ADT earthmoving scraper has a 49,000-lb. empty tare weight, a 54-cu.-yd. heaped capacity (ISO), a 14-ft. cutting width and a 40-ft. 6-in. overall length. Designed to be pulled with a six-wheel-drive, 40-ton+ (450+ hp) articulated dump truck, the unit features heavyduty pipe tubing construction and a unique hitch design that distribute the stress load evenly over the entire scraper, allowing the operator to easily move full loads. A push dozer/tractor in the cut is recommended to maximize capacity. Standard features include a push block, laser bracket mount and ride control. A large target area also enables fast, easy loading for use as a

Indicate 12 on inquiry card

MB Crusher BF 90.3 Bucket Crusher

The 7,716-lb. (3,500 kg) Model BF 90.3 bucket crusher offers an increased load capacity of .98 cu. yds. (.75 cu. meters), yet incorporates reduced overall dimensions to facilitate and speed up handling for faster crushing operations. The average hourly production has been increased by approximately 20% vs. the previous model. The center of gravity has been recalculated to reduce the perception of weight during movement and use. The strength of the rear structure has also been improved to increase impact resistance. Indicate 13 on inquiry card

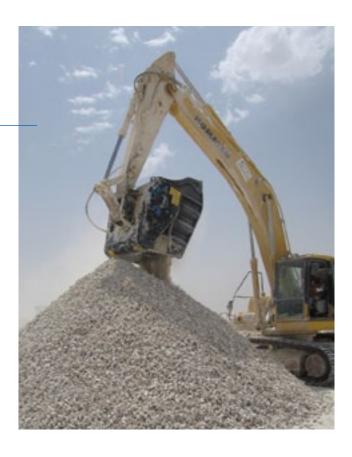

Lincoln Electric Outback 185 Welder

The Outback 185 engine-driven welder provides a smooth DC welding output of up to 185 amps for welding steel, stainless steel or cast iron, as well as hardfacing projects using up to 5/32-in. stick electrode. Its single, fullrange and calibrated welding output dial makes it easy to set the current to the task. The AC generator provides 5,700 watts of peak power and 5,200 watts of continuous power. Features include a 1 1/4-in.-diameter protective tube frame, Low-Lift grab bars for easy jobsite handling and mobility and an optional undercarriage for easy transport.

Indicate **14** on inquiry card